
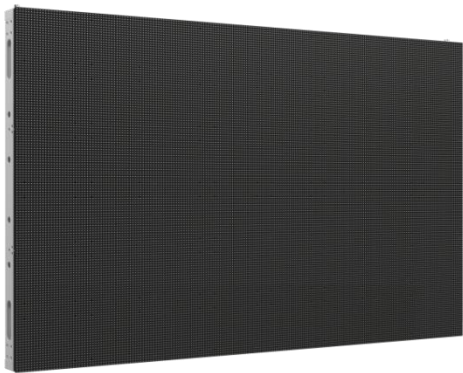


Outdoor LLO Cabinet Series

Product Specification

1. Product basic info

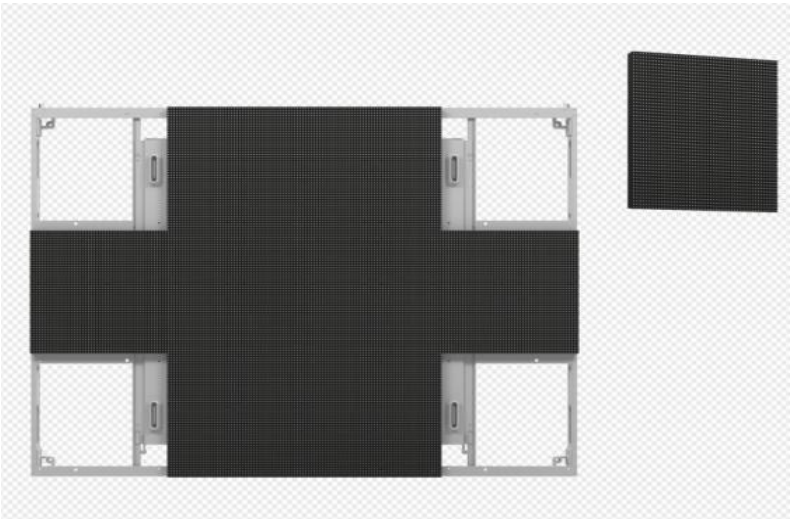

Model Name	Cabinet WxHxD (mm)	Pixel pitch (mm)	Module WxH (mm)
GG-100 LLO	Standard: 1280*960*71	10	320*320
GG-601 LLO		6.67	
GG-401 LLO		4.44	

2. Specification

		GG-100 LLO	GG-601 LLO	GG-401 LLO
Physical parameter	Pixel Configuration	SMD 3in1 2727		SMD 3in1 1921
	Pixel Pitch (mm)	10	6.67	4.44
	Module Resolution(dots)	32*32	48*48	72*72
	Module Size (mm)	320*320		
	Unit Area(m²)	Standard: 1.2288		
	Module Composition (WxH)	Standard: 4*3		
	Cabinet Resolution(dots)	128*96	192*144	288*216
	Pixel Density (Point/m²)	10,000	22,500	50,625
	Cabinet Dimension (WxHxD)mm	Standard: 1280*960*71		
	Cabinet Material	Aluminum Die-Casting Cabinet		
	Weight per cabinet(Kg)	35		
	Weight per sqm(Kg)	28		
	Protection Level Front/Rear	IP67		
Optical parameter	Brightness Max Calibrated (nit)	7500cd/m²		6000cd/m²
	Colour Temperature, Adjustable (K)	3000 to 10000		
	Viewing Angle(Horizontal)°	150		
	Viewing Angle (Vertical)°	110		
	Contrast Ratio	6000:1		
Electric Parameter	AC operation voltage	AC100~240V (50/60Hz)		
	Max Power Consumption (W/m²)	790W/SQM		720W/SQM
	Ave Power Consumption (W/m²)	265W/SQM		240W/SQM
Processing Performance	Grayscale (Bits)	≥14		
	Refresh Rate(Hz)	≥3840Hz		
	Frame Rate(Hz)	50&60		
	Lifetime (hrs)	100000		
Operation parameter	Installation Access	Front/Rear		
	Module Maintenance			
	PSU & Others Maintenance			
	Operating Temperature(°C)	-30°C~+50°C		
	Storage Temperature(°C)	-40°C~+60°C		
	Operating Humidity(%RH)	10~90% no condensation		
	Storage Humidity(%RH)	10~80% no condensation		




Creative For Electronic Industries

ADD: H Street, King Abdulla Second Industrial Zone, Sahab-Jordan

Website: www.gguard.com

3. Exterior dimension of cabinet

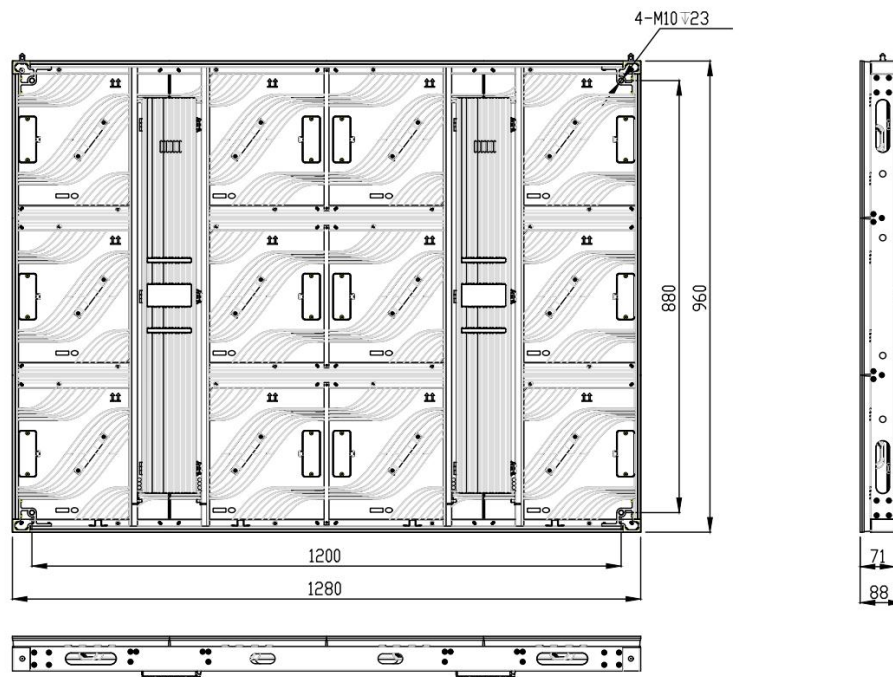

1 Standard cabinet: 1280 x 960mm